

GN-650

High Viscosity Mixer

➔ Suitable for Paste Ink Mixing

➔ Viscosity Range:0-500pa·s



SANTINT • CHINA

Add: Feilong Road, Xingyang,
Zhengzhou, China
Email: info@santint.com

SANTINT • HOLLAND

Add: Lageweg 35 - J, 2222 AG
Katwijk The Netherlands
Email: sales@santint-europe.com

SANTINT • POLAND

Add: 19 Postępu Street
(warehouse no. 5)02-676
Warsaw, Poland
Email: albert@santintpoland.com

SANTINT • U.S.A

Add: 2000 Bloomingdale Road,
Suite 205, Glendale Heights,
IL 60139, U.S.A
Email: info@santintusa.com


SANTINT • BRAZIL

Add: Av.Rosa Kasinski,
1109, G29 Capuava,Mauá,
SP - Brasil CEP 09380-128
Email: marcos@santint.com

SANTINT • INDIA

Add: H.No.692, Gala No.04,
Print World Industrial Complex,
Bhatale, Vehele Village, Opposite
Balaji Compound, Bhiwandi,
Maharashtra – 421302
Email: nick@santint.com

GN-650 FEATURES

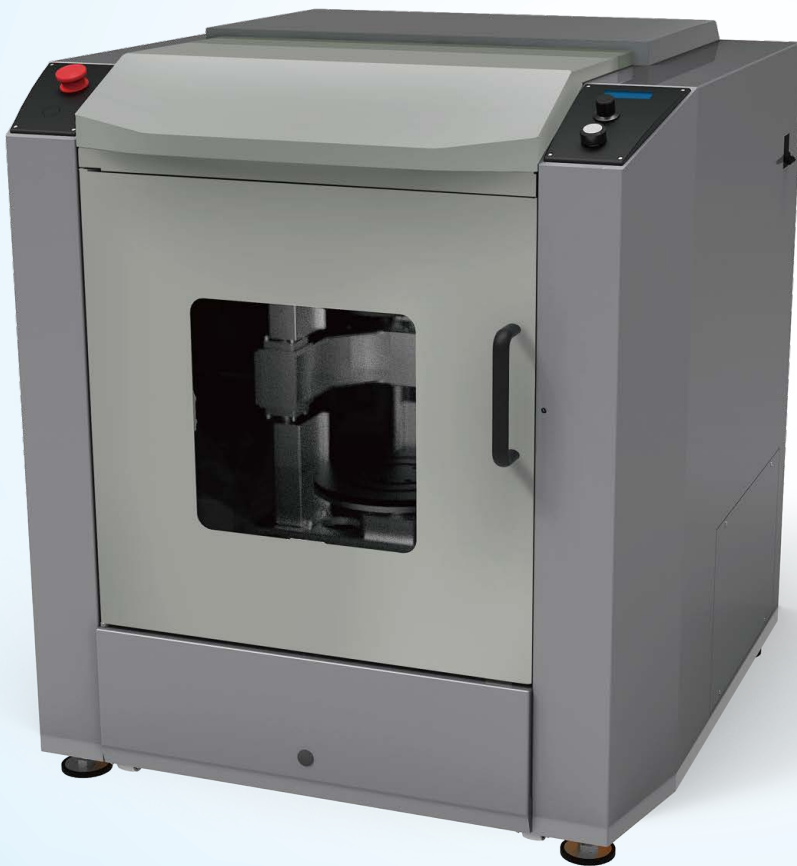

1 Innovation Technology

Adopt certain speed to achieve rapid mixing of paste, free from shoveling bottom and wall, Break through mixing way of traditional paste ink

2 In-can Mixing

Add the base ink in the ink tank according to formula ratio, Seal the ink tank, to rapidly mix spot color ink.

3 High Efficiency and Environment-friendly

4 min mixing for 1 kg spot color ink, 7 min mixing for 5 kg spot color ink, In-can mixing, to avoid effluent from cleaning mixer.

4 Save Labor

Free from the labor, reduce labor intensity

Product Name: High Viscosity Mixer	Motor Power: 2.2kW
Mixing way: Gyroscopic	Max Mixing Weight: 7kg (5L Can)
Can Height: 60-230mm	Max Can Diameter: 200mm
Mixing Time: Customizable	Pressure : 180-200kg
Mixing Speed: 400/600rpm	Viscosity : ≤ 500 pa.s
Ratio of revolution to rotation: 1:1.6	Door structure: Side door
Clamping Way: Automatic Clamping	Machine dimension(DXWXH): 845x880x980mm
Lead screw guide rail protection: Have	Voltage: 220v 50Hz/110v 60Hz

GN-650

Technical Parameters

